Catalogo 2010-2011

Unibat®

Batterie per:
moto, falciatrici, slitte, moto d'acqua, ATV, scooters

Batteries for:
motorcycles - riding mowers - snowmobiles - water sport vehicles - atv's - scooters

	Battery Type Number	C.C.A.	Capacity AH (10 hr)	Voltage (V)	Maximum Dimensions						Dry Weight Approx		Acid Volume (Liter)	Regular Charge Current (Amp)	Assembly Figure
					Millimeters			Inches							
					L	W	H	L	W	H	Kg	Lbs			
1	6N2-2A	/	2	6	70	47	96	2 3/4	1 7/8	3 3/4	0.4	1.0	0.1	0.2	
2	6N2-2A-1	/	2	6	70	47	96	2 3/4	1 7/8	3 3/4	0.4	1.0	0.1	0.2	
3	6N2-2A-2	/	2	6	70	47	96	2 3/4	1 7/8	3 3/4	0.4	1.0	0.1	0.2	
4	6N2-2A-3	/	2	6	70	47	96	2 3/4	1 7/8	3 3/4	0.4	1.0	0.1	0.2	
5	6N2-2A-4	/	2	6	70	47	96	2 3/4	1 7/8	3 3/4	0.4	1.0	0.1	0.2	
6	6N2-2A-5	/	2	6	70	47	96	2 3/4	1 7/8	3 3/4	0.4	1.0	0.1	0.2	
7	6N2-2A-6	/	2	6	70	47	96	2 3/4	1 7/8	3 3/4	0.4	1.0	0.1	0.2	
8	6N2-2A-7	/	2	6	70	47	96	2 3/4	1 7/8	3 3/4	0.4	1.0	0.1	0.2	
9	6N2-2A-8	/	2	6	70	47	96	2 3/4	1 7/8	3 3/4	0.4	1.0	0.1	0.2	
10	6N2-2D	/	2	6	70	47	96	2 3/4	1 7/8	4 1/8	0.6	1.3	0.1	0.2	
11	6N2A-2C	/	2	6	70	47	106	2 3/4	1 7/8	4 3/16	0.4	1.0	0.1	0.2	
12	6N2A-2C-1	/	2	6	70	47	106	2 3/4	1 7/8	4 3/16	0.4	1.0	0.1	0.2	
13	6N2A-2C-2	/	2	6	70	47	106	2 3/4	1 7/8	4 3/16	0.4	1.0	0.1	0.2	
14	6N2A-2C-3	/	2	6	70	47	106	2 3/4	1 7/8	4 3/16	0.4	1.0	0.1	0.2	
15	6N4-2A	/	4	6	71	71	96	2 13/16	2 13/16	3 3/4	0.6	1.3	0.2	0.4	
16	6N4-2A-2	/	4	6	71	71	96	2 13/16	2 13/16	3 3/4	0.6	1.3	0.2	0.4	
17	6N4-2A-3	/	4	6	71	71	96	2 13/16	2 13/16	3 3/4	0.6	1.3	0.2	0.4	
18	6N4-2A-4	/	4	6	71	71	96	2 13/16	2 13/16	3 3/4	0.6	1.3	0.2	0.4	
19	6N4-2A-5	/	4	6	71	71	96	2 13/16	2 13/16	3 3/4	0.6	1.3	0.2	0.4	
20	6N4-2A-6	/	4	6	71	71	96	2 13/16	2 13/16	3 3/4	0.6	1.3	0.2	0.4	
21	6N4-2A-7	/	4	6	71	71	96	2 13/16	2 13/16	3 3/4	0.6	1.3	0.2	0.4	
22	6N4-2A-8	/	4	6	71	71	96	2 13/16	2 13/16	3 3/4	0.6	1.3	0.2	0.4	
23	6N4A-4D	/	4	6	61	57	131	2 3/8	2 1/14	5 1/8	0.7	1.7	0.2	0.4	
24	6N4A-4D-1	/	4	6	61	57	131	2 3/8	2 1/14	5 1/8	0.7	1.7	0.2	0.4	
25	6N4B-2A	/	4	6	102	48	96	4 /	1 7/8	3 3/4	0.7	1.7	0.2	0.4	
26	6N4B-2A-1	/	4	6	102	48	96	4 /	1 7/8	3 3/4	0.7	1.7	0.2	0.4	
27	6N4B-2A-2	/	4	6	102	48	96	4 /	1 7/8	3 3/4	0.7	1.7	0.2	0.4	
28	6N4B-2A-3	/	4	6	102	48	96	4 /	1 7/8	3 3/4	0.7	1.7	0.2	0.4	
29	6N4B-2A-4	/	4	6	102	48	96	4 /	1 7/8	3 3/4	0.7	1.7	0.2	0.4	
30	6N4B-2A-5	/	4	6	102	48	96	4 /	1 7/8	3 3/4	0.7	1.7	0.2	0.4	
31	6N4C-1B	/	4	6	71	71	105	2 13/16	2 13/16	4 1/8	0.6	1.4	0.2	0.4	
32	6N5.5-3D	/	5.5	6	90	70	100	3 9/16	2 3/4	3 15/16	0.8	1.8	0.3	0.6	
33	6N5.5-1D	/	5.5	6	90	70	100	3 9/16	2 3/4	3 15/16	0.8	1.8	0.3	0.6	
34	6N5.5-1D-1	/	5.5	6	90	70	100	3 9/16	2 3/4	3 15/16	0.8	1.8	0.3	0.6	
35	6N6-1B	/	6	6	99	57	111	3 7/8	2 1/4	4 3/8	0.9	2.0	0.3	0.6	
36	6N6-1B-1	/	6	6	99	57	111	3 7/8	2 1/4	4 3/8	0.9	2.0	0.3	0.6	
37	6N6-3B	/	6	6	99	57	111	3 7/8	2 1/4	4 3/8	0.9	2.0	0.3	0.6	
38	6N6-3B-1	/	6	6	99	57	111	3 7/8	2 1/4	4 3/8	0.9	2.0	0.3	0.6	
39	6N6-1D	/	6	6	99	57	111	3 7/8	2 1/4	4 3/8	0.9	2.0	0.3	0.6	
40	6N6-1D-2	/	6	6	99	57	111	3 7/8	2 1/4	4 3/8	0.9	2.0	0.3	0.6	
41	6N6-1C	/	6	6	97	57	111	3 13/16	2 1/4	4 5/16	1.0	2.2	0.3	0.6	
42	B39-6 (6N7-1)	/	7	6	126	48	126	4 15/16	1 7/8	4 15/16	1.3	2.8	0.3	0.7	
43	B49-6	/	8	6	91	83	161	3 9/16	3 1/4	6 5/16	2.2	4.8	0.5	0.8	
44	6N11-2D	/	11	6	150	70	100	5 7/8	2 3/4	3 15/16	1.6	3.5	0.4	1.1	
45	6N11A-1B	/	11	6	122	62	131	4 13/16	2 7/16	5 1/8	1.6	3.5	0.4	1.1	
46	6N11A-3	/	11	6	122	62	132	4 13/16	2 7/16	5 3/16	2.1	4.6	0.4	1.1	
47	6N11A-4	/	11	6	122	62	132	4 13/16	2 7/16	5 3/16	2.1	4.6	0.4	1.1	
48	6N11A-3A	/	11	6	122	62	132	4 13/16	2 7/16	5 3/16	2.1	4.6	0.4	1.1	
49	6N11A-4A	/	11	6	122	62	132	4 13/16	2 7/16	5 3/16	2.1	4.6	0.4	1.1	
50	6N12A-2C (B54-6)	/	12	6	156	57	116	6 1/8	2 1/4	4 9/16	1.7	3.8	0.5	1.2	
51	6N12A-2D (B54-6A)	/	12	6	156	57	116	6 1/8	2 1/4	4 9/16	1.7	3.8	0.5	1.2	
52	B38-6A	/	13	6	119	83	161	4 11/16	3 1/4	6 5/16	2.1	4.7	0.7	1.4	
53	6V12AH (6A4-6V12A)	/	12	6	122	62	132	4 13/16	2 7/16	5 3/16	2.1	4.6	0.4	1.2	
54	6CB8-3B (6CB8L-B)	/	8	6	120	70	95	4 3/4	2 3/4	3 3/4	1.4	3.0	0.3	0.8	
55	6CB11-2D	/	11	6	150	70	100	5 7/8	2 3/4	3 15/16	2.0	4.4	0.4	1.1	

	Battery Type Number	C.C.A.	Capacity AH (10 hr)	Voltage (V)	Maximum Dimensions						Dry Weight Approx		Acid Volume (Liter)	Regular Charge Current (Amp)	Assembly Figure
					Millimeters			Inches							
					L	W	H	L	W	H	Kg	Lbs			
1	12N5-3B	39	5	12	120	60	130	4 3/4	2 3/8	5 1/8	1.4	3.1	0.4	0.5	
2	12N5-4B	39	5	12	120	60	130	4 3/4	2 3/8	5 1/8	1.4	3.1	0.4	0.5	
3	12N5.5-3	60	5.5	12	135	60	130	5 7/16	2 3/8	5 1/8	1.9	4.3	0.42	0.6	
4	12N5.5-3B	60	5.5	12	135	60	130	5 7/16	2 3/8	5 1/8	1.9	4.3	0.42	0.6	
5	12N5.5-4	60	5.5	12	135	60	130	5 7/16	2 3/8	5 1/8	1.9	4.3	0.42	0.6	
6	12N5.5-4A	60	5.5	12	135	60	130	5 7/16	2 3/8	5 1/8	1.9	4.3	0.42	0.6	
7	12N5.5-4A-1	60	5.5	12	135	60	130	5 7/16	2 3/8	5 1/8	1.9	4.3	0.42	0.6	
8	12N5.5-4B	60	5.5	12	135	60	130	5 7/16	2 3/8	5 1/8	1.9	4.3	0.42	0.6	
9	12N5.5A-3B	58	5.5	12	103	90	114	4 1/16	3 9/16	4 1/2	1.9	4.3	0.42	0.6	
10	12N7-3B	74	7	12	135	75	133	5 3/8	3 /	5 1/4	2.2	4.9	0.48	0.7	
11	12N7-3B-1	74	7	12	135	75	133	5 3/8	3 /	5 1/4	2.2	4.9	0.48	0.7	
12	12N7-4A	74	7	12	135	75	133	5 3/8	3 /	5 1/4	2.2	4.9	0.48	0.7	
13	12N7-4B	74	7	12	135	75	133	5 3/8	3 /	5 1/4	2.2	4.9	0.48	0.7	
14	12N7B-4A	74	7	12	150	60	130	5 15/16	2 3/8	5 3/16	2.2	4.9	0.5	0.7	
15	12N7C-3D	74	7	12	130	90	114	5 1/8	3 9/16	4 1/2	2.2	4.8	0.5	0.7	
16	12N7CZ-3D	74	8	12	130	90	114	5 1/8	3 9/16	4 1/2	2.2	4.8	0.5	0.8	
17	12N7D-3B	74	7	12	135	75	150	5 3/8	3 /	5 7/8	2.2	4.9	0.5	0.7	
18	12N9-3A	85	9	12	135	75	139	5 7/16	3 /	5 9/16	2.3	5.1	0.6	0.9	
19	12N9-3A-1	85	9	12	135	75	139	5 7/16	3 /	5 9/16	2.3	5.1	0.6	0.9	
20	12N9-3B	85	9	12	135	75	139	5 7/16	3 /	5 9/16	2.3	5.1	0.6	0.9	
21	12N9-4B-1	85	9	12	135	75	139	5 7/16	3 /	5 9/16	2.3	5.1	0.6	0.9	
22	12N9-4B	85	9	12	135	75	139	5 7/16	3 /	5 9/16	2.3	5.1	0.6	0.9	
23	12N10-3A	103	10	12	135	90	145	5 3/8	3 9/16	5 3/4	2.6	5.8	0.72	1.0	
24	12N10-3A-1	103	10	12	135	90	145	5 3/8	3 9/16	5 3/4	2.6	5.8	0.72	1.0	
25	12N10-3A-2	103	10	12	135	90	145	5 3/8	3 9/16	5 3/4	2.6	5.8	0.72	1.0	
26	12N10-3B	103	10	12	135	90	145	5 3/8	3 9/16	5 3/4	2.6	5.8	0.72	1.0	
27	12N10-3B-1	103	10	12	135	90	145	5 3/8	3 9/16	5 3/4	2.6	5.8	0.72	1.0	
28	12N11-3A	128	11	12	135	90	155	5 3/8	3 9/16	6 1/8	3.4	7.5	0.8	1.1	
29	12N11-3A-1	128	11	12	135	90	155	5 3/8	3 9/16	6 1/8	3.4	7.5	0.8	1.1	
30	12N11-3B	128	11	12	135	90	155	5 3/8	3 9/16	6 1/8	3.4	7.5	0.8	1.1	
31	12N12-3A	120	12	12	202	76	134	7 15/16	3 /	5 1/4	3.1	6.8	0.8	1.2	
32	12N12-3B	120	12	12	202	76	134	7 15/16	3 /	5 1/4	3.1	6.8	0.8	1.2	
33	12N12A-4A-1	113	12	12	134	80	160	5 3/8	3 3/16	6 3/8	3.1	6.8	0.72	1.2	
34	12N14-3A	128	14	12	134	89	166	5 3/8	3 9/16	6 5/8	3.4	7.5	0.8	1.4	
35	12N14-3B	128	14	12	134	89	166	5 3/8	3 9/16	6 5/8	3.4	7.5	0.8	1.4	
36	12N16-3A	190	16	12	175	100	155	6 15/16	4 /	6 1/8	5.4	11.8	1.2	1.6	
37	12N16-3B	190	16	12	175	100	155	6 15/16	4 /	6 1/8	5.4	11.8	1.2	1.6	
38	12N16-4B	190	16	12	175	100	155	6 15/16	4 /	6 1/8	5.4	11.8	1.2	1.6	
39	12C16A-3B (12N16AH)	240	16	12	186	81	170	7 5/16	3 3/16	6 11/16	4.6	8.8	0.96	1.6	
40	12N20AH	260	20	12	186	81	170	7 5/16	3 3/16	6 11/16	4.6	8.8	0.96	1.6	
41	12N18-3	190	18	12	206	91	164	8 1/8	3 9/16	6 7/16	4.7	10.4	1.2	1.8	
42	12N18-3A	190	18	12	206	91	164	8 1/8	3 9/16	6 7/16	4.7	10.4	1.2	1.8	
43	12N18-3B	190	18	12	206	91	164	8 1/8	3 9/16	6 7/16	4.7	10.4	1.2	1.8	
44	12N24-3	200	24	12	184	124	160	7 5/16	4 15/16	6 2/7	5.5	12.1	1.8	2.4	
45	12N24-3A	200	24	12	184	124	170	7 5/16	4 15/16	6 11/16	5.5	12.1	1.8	2.4	
46	12N24-4	200	24	12	184	124	160	7 5/16	4 15/16	6 2/7	5.5	12.1	1.8	2.4	
47	CB2.5L-C	19	2.5	12	80	70	105	3 3/16	2 13/16	4 1/8	0.8	1.7	0.24	0.25	
48	CB2.5L-C-1	19	2.5	12	80	70	105	3 3/16	2 13/16	4 1/8	0.8	1.7	0.24	0.25	
49	CB2.5L-C-2	19	2.5	12	80	70	105	3 3/16	2 13/16	4 1/8	0.8	1.7	0.24	0.25	
50	CB3L-A	32	3	12	98	56	110	3 7/8	2 1/4	4 3/8	1.2	2.5	0.24	0.3	
51	CB3L-B	32	3	12	98	56	110	3 7/8	2 1/4	4 3/8	1.2	2.5	0.24	0.3	
52	CB4L-A	56	4	12	120	70	92	4 3/4	2 13/16	3 5/8	1.3	2.8	0.3	0.4	
53	CB4L-B	56	4	12	120	70	92	4 3/4	2 13/16	3 5/8	1.3	2.8	0.3	0.4	
54	CB5L-B	65	5	12	120	60	130	4 3/4	2 3/8	5 1/8	1.6	3.5	0.4	0.5	
55	CB7-A	124	8	12	135	75	133	5 3/8	3 /	5 1/4	2.3	5.1	0.6	0.7	

	Battery Type Number	C.C.A.	Capacity AH (10 hr)	Voltage (V)	Maximum Dimensions						Dry Weight Approx		Acid Volume (Liter)	Regular Charge Current (Amp)	Assembly Figure
					Millimeters			Inches							
					L	W	H	L	W	H	Kg	Lbs			
1	CB7A-A	124	8	12	135	75	148	5 3/8	3 /	5 13/16	2.9	6.4	0.6	0.7	
2	CB7C-A	124	8	12	130	90	114	5 1/8	3 9/16	4 1/2	2.3	5.1	0.5	0.8	
3	CB7L-A	124	8	12	135	75	133	5 3/8	3 /	5 1/4	2.3	5.1	0.6	0.7	
4	CB7L-B2	124	8	12	135	75	133	5 3/8	3 /	5 1/4	2.3	5.1	0.6	0.7	
5	CB9A- A	124	9	12	135	75	155	5 7/16	3 /	6 13/16	2.4	5.3	0.6	0.9	
6	CB9-B	130	9	12	135	75	139	5 7/16	3 /	5 9/16	2.4	5.3	0.6	0.9	
7	CB9L-B	130	9	12	135	75	139	5 7/16	3 /	5 9/16	2.4	5.3	0.6	0.9	
8	CB9L-A2	124	9	12	135	75	139	5 7/16	3 /	5 9/16	2.4	5.3	0.6	0.9	
9	CB10A-A2	160	11	12	135	90	155	5 3/8	3 9/16	6 1/8	3.2	7.1	0.7	1.0	
10	CB10L-A2	160	11	12	135	90	145	5 3/8	3 9/16	5 3/4	3.2	7.1	0.7	1.1	
11	CB10L-B-P	160	11	12	135	90	145	5 3/8	3 9/16	5 3/4	3.2	7.1	0.7	1.1	
12	CB10L-B2	160	11	12	135	90	145	5 3/8	3 9/16	5 3/4	3.2	7.1	0.7	1.1	
13	CB12A-A	165	12	12	134	80	160	5 3/8	3 3/16	6 3/8	3.2	7.1	0.7	1.2	
14	CB12A-B	165	12	12	134	80	160	5 3/8	3 3/16	6 3/8	3.2	7.1	0.7	1.2	
15	CB12AL-A	165	12	12	134	80	160	5 3/8	3 3/16	6 3/8	3.2	7.1	0.7	1.2	
16	CB12AL-A2	165	12	12	134	80	160	5 3/8	3 3/16	6 3/8	3.2	7.1	0.7	1.2	
17	CB12B-B2	165	12	12	160	90	130	5 5/16	3 9/16	5 1/8	3.2	7.1	0.7	1.2	
18	CB12C-A	165	12	12	134	80	175	5 3/8	3 7/32	6 15/16	3.2	7.1	0.7	1.2	
19	CB14-A2	190	14	12	134	89	166	5 3/8	3 9/16	6 5/8	3.6	7.9	0.8	1.4	
20	CB14-B2	190	14	12	134	89	166	5 3/8	3 9/16	6 5/8	3.6	7.9	0.8	1.4	
21	CB14A-A1	190	14	12	134	89	176	5 3/8	3 9/16	7 /	3.6	7.9	0.8	1.4	
22	CB14A-A2	190	14	12	134	89	176	5 3/8	3 9/16	7 /	3.6	7.9	0.8	1.4	
23	CB14L-A1	190	14	12	134	89	166	5 3/8	3 9/16	6 5/8	3.6	7.9	0.8	1.4	
24	CB14L-A2	190	14	12	134	89	166	5 3/8	3 9/16	6 5/8	3.6	7.9	0.9	1.4	
25	CB14L-B2	190	14	12	134	89	166	5 3/8	3 9/16	6 5/8	3.6	7.9	0.8	1.4	
26	SCB14L-A2	190	14	12	134	89	166	5 3/8	3 9/16	6 5/8	3.6	7.9	0.9	1.4	With Sensor
27	SCB14L-B2	190	14	12	134	89	166	5 3/8	3 9/16	6 5/8	3.6	7.9	0.8	1.4	With Sensor
28	CB16-B	240	19	12	175	100	155	6 15/16	4 /	6 1/8	4.7	10.4	1.2	1.9	
29	CB16L-B	240	19	12	175	100	155	6 15/16	4 /	6 1/8	4.7	10.4	1.2	1.9	
30	CB16AL-A2	200	16	12	207	71.5	164	8 1/16	2 13/16	6 7/16	4.6	10.1	1.0	1.6	
31	CB16B-A	207	16	12	160	90	161	6 3/8	3 5/8	6 3/8	4.5	9.9	1.25	1.6	
32	CB16B-A1	207	16	12	160	90	161	6 3/8	3 5/8	6 7/16	3.8	8.4	1.25	1.6	
33	CB16CL-B	240	19	12	175	100	175	6 15/16	4 /	6 7/8	4.7	10.4	1.25	1.9	
34	HCB16A-A	210	16	12	151	91	180	6 /	3 5/8	7 1/8	3.8	8.4	1.1	1.6	
35	CB16-B-CX	255	19	12	175	100	155	6 15/16	4 /	6 1/8	4.7	10.4	1.2	1.9	
36	CB16HL-A-CX	255	19	12	175	100	155	6 15/16	4 /	6 1/8	4.7	10.4	1.2	1.9	
37	CB18-A	235	18	12	180	90	162	7 1/8	3 5/8	6 7/16	4.4	9.7	1.2	1.8	
38	CB18L-A	235	18	12	180	90	162	7 1/8	3 5/8	6 7/16	4.4	9.7	1.2	1.8	
39	CB30CL-B	300	30	12	168	132	192	6 5/8	5 3/16	7 9/16	9.0	19.84	1.63	3.0	
40	CB30L-B	300	30	12	168	132	176	6 5/8	5 3/16	6 15/16	6.4	14.10	1.63	3.0	
41	C50-N18A-A	260	20	12	205	90	176	8 1/8	3 9/16	5 15/16	5.1	11.2	1.5	2.0	
42	C50-N18L-A	260	20	12	205	90	162	8 1/8	3 9/16	6 7/16	5.1	11.2	1.5	2.0	
43	C50-N18L-A2	260	20	12	205	90	162	8 1/8	3 9/16	6 7/16	5.1	11.2	1.5	2.0	
44	C50-N18L-A3	260	20	12	205	90	162	8 1/8	3 9/16	6 7/16	5.1	11.2	1.5	2.0	
45	SC50-N18L-A	260	20	12	205	90	162	8 1/8	3 9/16	6 7/16	5.1	11.2	1.5	2.0	With Sensor
46	SC50-N18L-AT	260	20	12	205	90	162	8 1/8	3 9/16	6 7/16	5.1	11.2	1.5	2.0	With Sensor
47	C60-N24L-A	300	28	12	184	124	170	7 1/4	4 15/16	6 11/16	6.5	14.4	1.7	2.8	
48	C60-N24AL-B	300	28	12	184	124	170	7 1/4	4 15/16	6 11/16	6.5	14.4	1.7	2.8	
49	C60-N28L-A (52816)	180*	28	12	187	130	170	7 3/8	5 1/8	6 11/16	6.5	14.3	1.7	3.0	
50	C60-N30L-A (53030)	180*	30	12	186	130	171	7 3/8	5 1/8	6 11/16	6.5	14.3	1.7	3.0	
51	C60-N30L-A/HD	180*	30	12	186	130	171	7 3/8	5 1/8	6 11/16	6.5	14.3	1.7	3.0	
52	C60-N35L-A/HD	240*	35	12	238	131	167	7 /	5 /	6 /	6.5	14.3	1.7	3.0	
53	B68-12	180*	28	12	184	124	170	7 1/4	4 15/16	6 11/16	6.5	14.3	1.7	2.8	
54	CHD4-12 (H-12)	240	28	12	202	130	163	8 1/16	5 3/16	6 1/2	6.0	13.3	2.0	3.2	
55															

(*) VALORI IN DIN / DIN VALUE

CB=YB for example CB4L-B=YB4L-B

RIDING MOWER BATTERY / BATTERIE PER FALCIATRICI

Battery Type Number	C.C.A.	Capacity AH (10 hr)	Voltage (V)	Maximum Dimensions						Dry Weight Approx		Acid Volume (Liter)	Regular Charge Current (Amp)	Assembly Figure
				Millimeters			Inches							
				L	W	H	L	W	H	Kg	Lbs			
U1 (7)	175	21	12	196	130	156	7 3/4	5 1/4	7 1/4	5.0	11.00	2.04	1.8	
U1 (9)	235	28	12	196	130	156	7 3/4	5 1/4	7 1/4	5.75	12.65	1.92	2.4	
U1R (7)	175	21	12	196	130	156	7 3/4	5 1/4	7 1/4	5.75	11.00	2.04	1.8	
U1R (9)	235	28	12	196	130	156	7 3/4	5 1/4	7 1/4	5.75	12.65	1.92	2.4	

MOTORCYCLE MAINTENANCE FREE BATTERY / BATTERIE SENZA MANUTENZIONE

	Battery Type Number	C.C.A.	Capacity AH (10 hr)	Voltage (V)	Maximum Dimensions						Dry Weight Approx		Acid Volume (Liter)	Regular Charge Current (Amp)	Assembly Figure
					Millimeters			Inches							
					L	W	H	L	W	H	Kg	Lbs			
1	CBTX4L-BS*	50	3	12	114	71	86	4 3/8	2 1/2	3 13/16	1.6	3.5	0.18	0.3	
2	CBTX5L-BS*	70	4	12	114	71	106	4 1/2	2 13/16	4 3/16	1.6	3.5	0.26	0.4	
3	CBTX7L-BS*	85	6	12	114	71	131	4 1/2	2 13/16	5 3/16	2.3	5.1	0.35	0.6	
4	CBTX7A-BS*	90	6	12	150	87	94	6 /	3 1/2	3 11/16	2.4	5.3	0.35	0.6	
5	CBTX9-BS*	120	8	12	150	87	105	6 /	3 1/2	4 3/16	2.5	5.4	0.42	0.8	
6	CBTX9A-BS*	130	9	12	135	75	139	5 7/16	3 /	5 9/16	2.6	5.8	0.49	0.9	
7	CBTX12-BS*	180	10	12	150	87	130	6 /	3 1/2	5 1/8	3.5	7.8	0.60	1.0	
8	CBTX14-BS*	200	12	12	150	87	145	6 /	3 1/2	5 13/16	3.8	8.4	0.70	1.2	
9	CBTX14AHL-BS*	210	12	12	134	89	166	5 5/16	3 1/2	6 9/16	4.08	9.0	0.66	1.2	
10	CBTX15L-BS*	230	13	12	175	87	130	6 7/8	3 7/16	5 3/16	4.0	8.8	0.75	/	
11	CBTH16-12	230	16	12	152	88	163	6 /	3 7/16	6 5/16	6.9	15.5	0.80	1.4	
12	CBTX16-BS*	230	14	12	150	87	161	6 /	3 7/16	6 5/16	5.40	11.90	0.80	/	
13	CBTX16-BS-1*	230	14	12	150	87	161	6 /	3 7/16	6 5/16	5.40	11.90	0.80	/	
14	CBTX18L-BS*	280	21	12	205	87	162	8 1/8	3 7/16	6 3/8	6.50	14.20	0.99	/	
15	CBTX20L-BS*	270	18	12	175	87	155	6 7/8	3 5/16	6 1/16	5.1	11.3	0.93	/	
16	CBTX20-BS*	270	18	12	175	87	155	6 7/8	3 5/16	6 1/6	5.10	11.30	0.93	/	
17	12N20AH-BS*	260	20	12	185	81	170	/ /	/ /	/ /	5.4	/	0.80	/	
18	CBTX20CH-BS*	270	18	12	150	87	161	6 /	3 1/2	6 4/9	4.26	9.37	0.82	/	
19	CBTX24HL-BS*	300	21	12	205	87	161	/ /	/ /	/ /	7.5	/	1.10	/	
20	CIX30L	335	27.5	12	166	126	175	6 9/16	5 /	6 7/8	9.08	20.02	/	3.0	
21	CTR4A-BS*	45	2.3	12	114	49	86	4 3/8	1 15/16	3 3/8	0.9	2.0	0.14	/	
22	CT4B-BS*	40	2.3	12	113	38	85.5	4 1/2	1 9/16	3 3/8	0.85	1.87	0.12	/	
23	CTR9-BS*	120	8	12	150	87	105	6 /	3 1/2	4 3/16	2.70	5.8	0.40	/	
24	CT12A-BS*	175	10	12	150	87	105	6 /	3 1/2	4 3/16	3.50	7.80	0.50	/	
25	CP18-12	260	18	12	181	76	167	7 1/8	2 3/16	6 9/16	5.98	13.20	- -	/	
26	CT4B-5	40	2.3	12	113	38	85.5	4 1/2	1 9/16	3 3/8	1.00	2.20	N/A	/	
27	CTZ6S-BS*	90	5	12	113	70	105	4 7/16	2 3/4	4 1/8	2.30	5.50	0.30	/	
28	CT7B-4	85	6.5	12	150	65	93	6 /	2 9/16	3 11/16	2.60	5.70	N/A	/	
29	CT7B-BS*	85	6.5	12	150	65	93	5 /	2 /	3 /	2.30	5.07	0.30	/	
30	CT9B-4	115	8	12	150	70	105	6 /	2 3/4	4 1/8	3.40	7.48	N/A	/	
31	CT9B-BS*	115	8	12	150	70	105	5 /	2 /	4 /	3.78	6.30	0.40	/	
32	CT12B-4	125	11	12	151	70	130	6 1/16	2 3/4	5 1/8	4.10	9.02	N/A	/	
33	CT12B-BS*	125	11	12	151	70	130	5 /	2 /	5 /	3.4	7.48	0.50	/	
34	CT14B-4	135	12	12	152	70	145	6 1/6	2 3/4	5 3/4	4.70	10.34	N/A	/	
35	CT14B-BS*	135	12	12	152	70	145	5 /	2 /	5 /	5.64	9.4	0.65	/	
36	CTZ5S-BS*	65	4	12	113	70	85	4 1/2	2 4/5	3 2/5	1.30	2.86	0.18	/	
37	CTZ7S	130	6	12	113	70	105	4 7/16	2 3/4	4 1/8	2.10	4.62	N/A	/	
38	CTZ7S-BS*	130	6	12	113	70	105	4 7/16	2 3/4	4 1/8	1.70	3.80	0.33	/	
39	CTZ10S	190	8.6	12	150	87	93	6 /	3 7/16	3 11/16	3.20	7.04	N/A	/	
40	CTZ10S-BS*	190	8.6	12	150	87	93	6 /	3 7/16	3 11/16	2.80	6.17	0.35	/	
41	CTZ12S	210	11	12	150	87	110	6 /	3 7/16	4 3/8	3.70	8.14	N/A	/	
42	CTZ12S-BS*	210	11	12	150	87	110	6 /	3 7/16	4 3/8	3.00	6.61	0.55	/	
43	CTZ14S	230	11.2	12	150	87	110	6 /	3 7/16	4 3/8	3.90	8.58	N/A	/	
44	CTZ14S-BS*	230	11.2	12	150	87	110	6 /	3 7/16	4 3/8	3.10	6.83	0.55	/	

(*) BATTERY WITH BOTTLE OF ACID IN THE PACKAGE / BATTERIA CON ACIDO A CORREDO

BATTERIE CONVENZIONALI CON ACIDO PREDOSATO A CORREDO

CONVENTIONAL BATTERIES WITH ACID PACK

	Battery Type Number	C.C.A.	Capacity AH (10 hr)	Voltage (V)	Maximum Dimensions						Dry Weight Approx		Acid Volume (Liter)	Regular Charge Current (Amp)	Assembly Figure
					Millimeters			Inches							
					L	W	H	L	W	H	Kg	Lbs			
1	CB4L-B/SM	56	4	12	120	70	92	4 3/4	2 13/16	3 5/8	1.3	2.8	0.3	0.4	
2	CB5L-B/SM	65	5	12	120	60	130	4 3/4	2 3/8	5 1/8	1.6	3.5	0.4	0.5	
3	CB7L-B2/SM	124	8	12	135	75	133	5 3/8	3 /	5 1/4	2.3	5.1	0.6	0.7	
4	CB9-B/SM	130	9	12	135	75	139	5 7/16	3 /	5 9/16	2.4	5.3	0.6	0.9	
5	CB10L-B-P/SM	160	11	12	135	90	145	5 3/8	3 9/16	5 3/4	3.2	7.1	0.7	1.1	
6	CB12AL-A/SM	165	12	12	134	80	160	5 3/8	3 3/16	6 3/8	3.2	7.1	0.7	1.2	
7	CB14L-A2/SM	190	14	12	134	89	166	5 3/8	3 9/16	6 5/8	3.6	7.9	0.9	1.4	

LA NUOVA GENERAZIONE DI BATTERIE SERIE CTZ

Grazie all'inserimento nella nostra gamma dei nuovi modelli **CTZ**, oggi è possibile sostituire le batterie MF serie **CBTX** con questi nuovi modelli che hanno uno spunto di avviamento maggiore.

THE NEW GENERATION OF CTZ BATTERIES

Thanks to the new **CTZ** items, now you can replace your MF **CBTX** model with these new batteries which have a higher starting power.

MODEL	TYPE	SIZE L x W x H (mm)	AH	CCA
CTZ7S-BS	DRY WITH BOTTLE OF ACID	113 x 70 x 105	6	130
CBTX7L-BS	DRY WITH BOTTLE OF ACID	114 x 71 x 131	6	85
CTZ10S-BS	DRY WITH BOTTLE OF ACID	150 x 87 x 93	8,6	190
CBTX9-BS	DRY WITH BOTTLE OF ACID	152 x 88 x 106	8	120
CTZ12S-BS	DRY WITH BOTTLE OF ACID	150 x 87 x 110	11	210
CBTX12-BS	DRY WITH BOTTLE OF ACID	152 x 87 x 130	10	180
CTZ14S-BS	DRY WITH BOTTLE OF ACID	150 x 87 x 110	11,2	230
CBTX14-BS	DRY WITH BOTTLE OF ACID	150 x 88 x 145	12	200

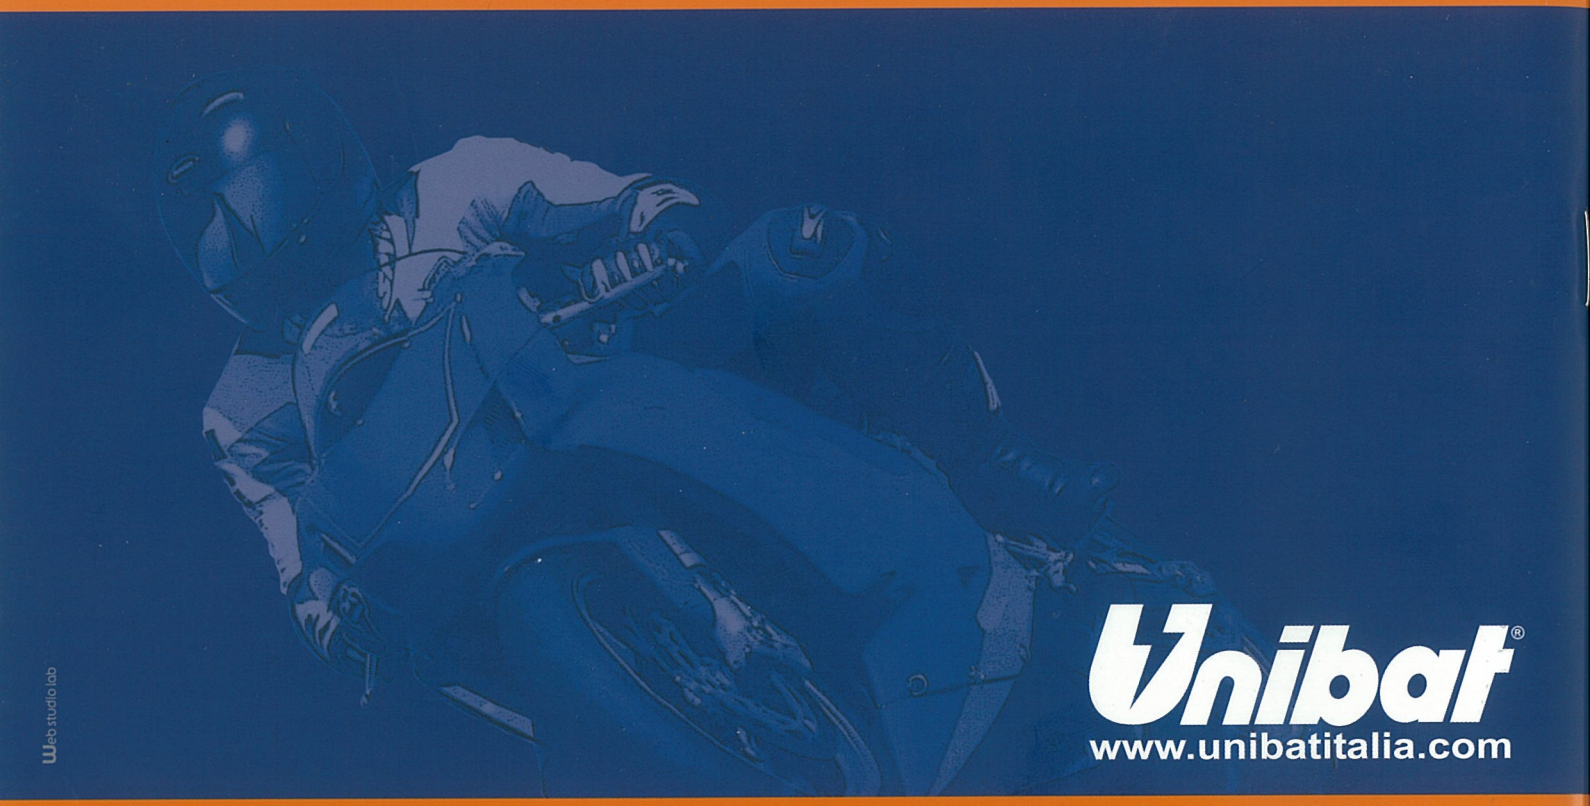

SAMAUTO s.r.l.
Via Lorenzo Larocca, 5
Zona Industriale
70123 Bari - ITALY
Tel +39.080.505.29.01 PBX
Fax +39.080.566.21.10
www.unibatitalia.com
Per info: samauto@tin.it